

Crystal Screen Series

Create a more Valuable Urban Advertising Media



Beijing's eight-minute show of PyeongChang Winter Olympic.
Crystal Screen Series



Key Features

82% Transparency

High transparency, without any change of architectural appearance and transparency of glass wall, make video content emerge into building and life.



Smart control

Smart control by mobile APP, wireless data transmission, screen+ data cloud + APP, WIFI connection.



Wider advertising Scope | viewing angle 120°

YIPLD Crystal Screen delivers awe-inspiring picture quality across the entire screen, even from wide viewing angles.



Modularized | DIY design

Any size screen combination flexible, no steel structure, no complicated installation, easy and convenient.




High brightness | 5000cd / m²

still visible clearly under strong light.



Crystal Screen Series

Create a more Valuable Urban Advertising Media



Screen Size

1500 × 500

Application Scenarios

Glass wall, large indoor space

Crystal Screen Series

- Transparency: 82%
- Brightness : 5000cd/m²
- Depth: 21mm
- Viewing Angle: 120°



Modularized



120° Wide Viewing Angle



Simple Colorful




New Configuration

Other Features

Super(or ultra) transparent

More than 82% transparency, the highest transparency in led screen industry.



High contrast ratio

High contrast ratio 1500:1, stunning color, dynamic image and eye-catching.



Smart

Smart control by mobile APP, wireless data transmission, screen+data cloud+APP, WIFI connection.




High refresh rate

High refresh rate: in the industry, the minimum pixel pitch (able to mass production) 3mm, 7680HZ refresh rate.



Simple

No complicated installation, No steel structure, fast positioning and fast installation, convenient and quick maintenance.

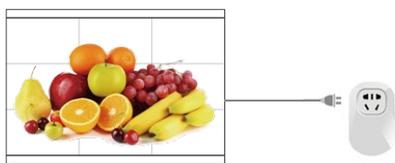

New Configuration


The shape innovation of static glass, new screen displaying, new advertising type.




Dimensions (unit : mm)

1500 × 500 × 85 /
16Kg

Left

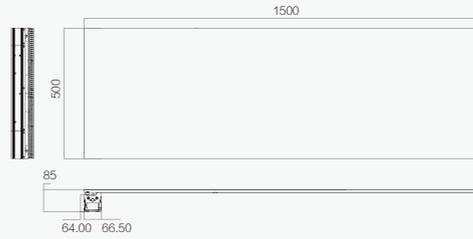


Right

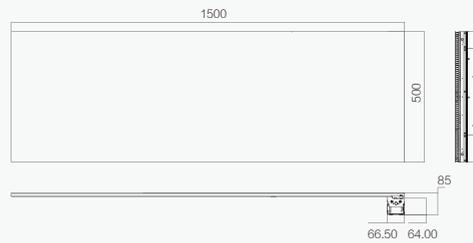


Connectivity

- 1 Live wire
- 2 Neutral wire
- 3 Earth wire
- 4 LAN

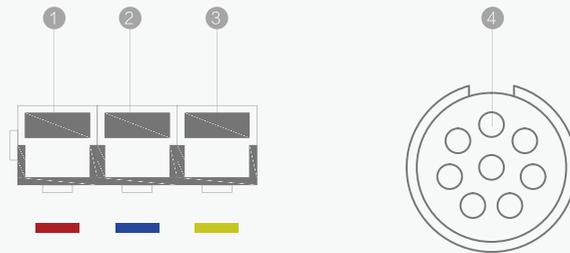


2 Types of Installation

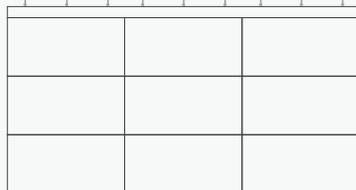

Hang

Floor stand

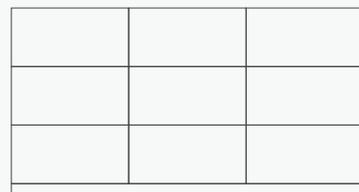

Specifications

Size (mm) 1500X 500

Model	C3	
	-R1500	-L1500
Pixel Pitch (mm)	3.9 x 7.8	
Pixel Density(dot/m ²)	32768	
Module Size	1500X500X85	
Module Resolution (dot)	384X64	
LED Type	SMD 3 in 1	
Brightness (cd/m ²)	5000	
Transparency	82%	
Viewing Angle	120°	
Grey Level	16bits	
Scan Mode	1/4	
Refresh Rate (Hz)	7680	
Frame Frequency (Hz)	60	
Avg.Power Consumption(W/ m ²)	240	
Max.Power Consumption(W/ m ²)	400	
Maintenance	Back	
IP	IP42	
Working Temp	-20~50℃	
Weight (kg/ m ²)	16	

System topology

